



FLEX Series

FLEXIBLE DIRECT-VIEW LED DISPLAYS

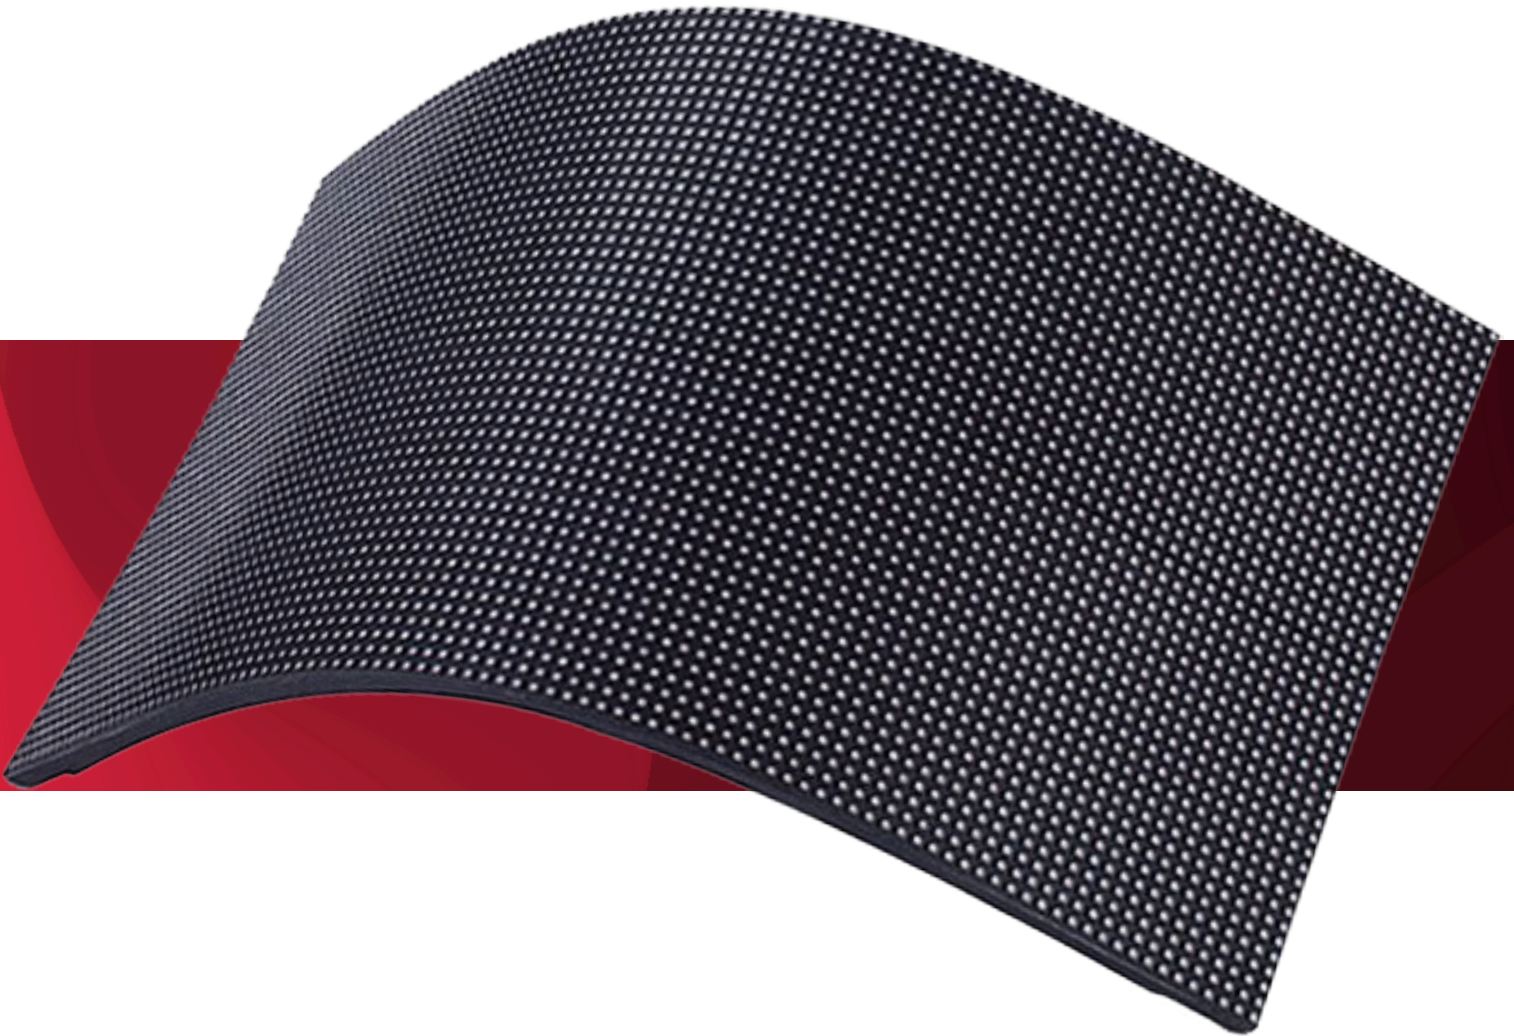

True Curve Design

Where flat panels have a faceted design when curved, the Creative Flex Series provides a true seamless, smooth display.

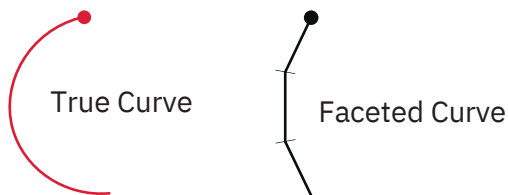

Diameters For Design


Tight minimum diameters give freedom to design a display that's truly unique!

CF16I, CF19I, and CF25I

Minimum Concave Diameter: 45 inches
Minimum Convex Diameter: 30 inches

CF3I, CF4I, and CF6I

Minimum Concave Diameter: 29 inches
Minimum Convex Diameter: 14.4 inches

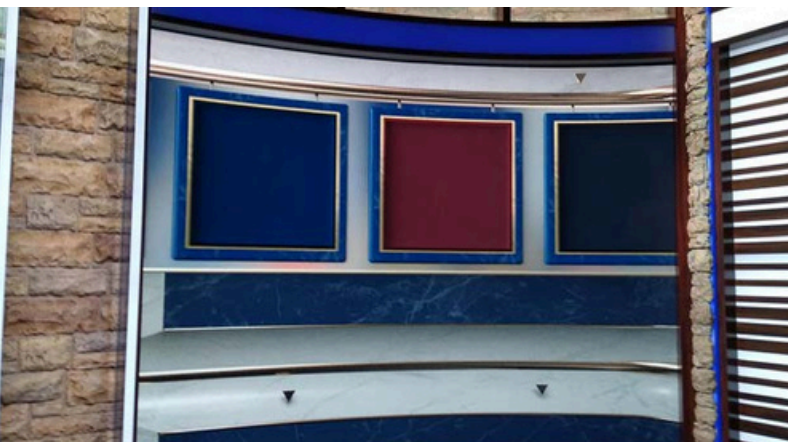



Flex Series

SPECIFICATIONS

1.2 – 6.0
Pixel Pitch

Flexible
For Custom Shapes

Front
Install & Service

		CF121	CF161	CF191	CF251	CF31	CF41	CF61	
DISPLAY PROPERTIES	Pixel Pitch	1.25mm	1.67mm	1.92mm	2.5mm	3mm	4mm	6mm	
	Resolution (H/V)	160x240px	240x180px	208x156px	160x120px	96x48px	72x36px	48x24px	
	Brightness	600 nits			800 nits	1000 nits			
	Refresh Rate	≥ 1920 Hz					≥ 960 Hz		
	Contrast	5000:1							
	Color Depth	14 bit							
	Diode Type	SMD							
ENGINEERING	Panel Weight	1.10 lbs	2.91 lbs			.79 lbs			
	Panel Dimensions (W x H x D)	200 x 300 x 8mm	400 x 300 x 10mm				288 x 144 x 7.5mm		
	Installation & Service	Front/Back							
	Operating Voltage	AC 110 ~ 240V (50 ~ 60Hz)							
	Power (W/sqm)	30 / 10 W	128 / 45 W			97 / 32 W			
	Operating Temperature	-4°~ + 140°F							
	Environment Rating	IP43 (Indoor)							
Certifications	FCC, CE, RoHS								

Specifications are accurate at time of printing. Actual specifications may vary due to customizations or updates. Specifications should be confirmed upon ordering



(260) 494-1499
NEOTI.COM

910 W. LANCASTER ST., BLUFFTON, IN 46714
SALES@NEOTI.COM | SERVICE@NEOTI.COM